



2008 AKA MANUAL

ADDENDUM No. 6

Issued: 5th February 2008

RE: MANUAL CHAPTER 36.20 – CORRECTION

The following section Chapter 36 shows the correct wording of Chapter 36.20 – Addendum 6 reflects the wording below as a correction to the AKA Manual 2008.

36.20 Ignition:

- (i) Must be external rotor type and OEM supply.
- (ii) Both CDI and TCI ignition units as supplied by Yamaha are eligible.
- (iii) No modifications or internal repairs to the TCI unit are permissible.
- (iv) No CDI unit shall vary more than one (1) degrees between 5,000 rpm and 10,000 rpm.
- (v) It is permissible to repair/replace the connector for both CDI and TCI modules and mating wire.
- (vi) Maximum inside diameter measurement of the ignition rotor to be 62.00mm

IGNITION ROTOR

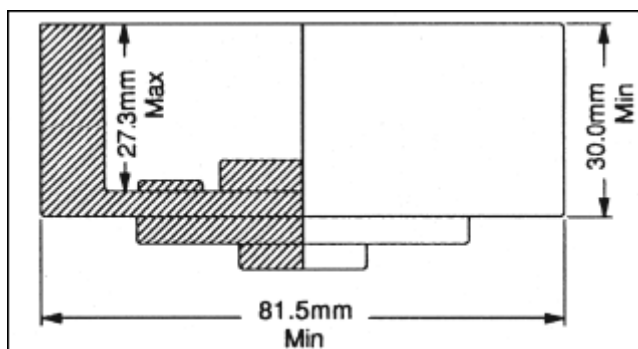


DIAGRAM IS FOR DIMENSIONAL REFERENCE ONLY

Pam Arnett
Secretary